



THE DIFFERENCE IS IN OUR QUALITY

**KOMATSU
GENERAL
CONSTRUCTION
UNDERCARRIAGE
Light Duty Track**

**SPECIFICALLY DESIGNED AND
MANUFACTURED TO ENSURE BEST
PERFORMANCE, PRODUCTION
AND COST EFFECTIVE TRACK
LIFE FOR YOUR LIGHT DUTY
UNDERCARRIAGE APPLICATIONS.**

KOMATSU
GENUINEPARTS
Quality Matters

LOWER COST, for light duty application



GENERAL CONSTRUCTION UNDERCARRIAGE light duty track link (GC)

REDUCE YOUR OPERATING COSTS

SUITABLE APPLICATION



GC Track should be used in low to moderate impact application, such as:

- civil construction • general excavation
- earth moving • dirt loading • high travel/low impact
- abrasive ground condition

NON-SUITABLE APPLICATION



GC Track should not be used in high-impact applications, such as:

- rocky or other high-impact applications • quarry
- demolition • forestry


GC APPLICATION CHART

Abrasion resistance:
GC same Standard

Impact resistance:
GC < Standard

Guidelines for use:

- If Standard Track lasted between 8000 - 10000 hours: you can replace it with GC link.
- If Standard Track experienced cracks or breaks on Links or Pins: you cannot replace it with GC as the issue might get worse (due to lower material durability).

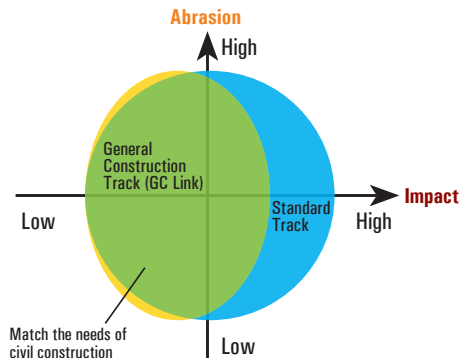

Komatsu Genuine Parts Stamp of Approval

Speak to your product support manager for the different undercarriage applications suitable for you.

www.komatsu.co.za